


### Anchor rods for injection anchors XV Plus

for solid and perforated blocks

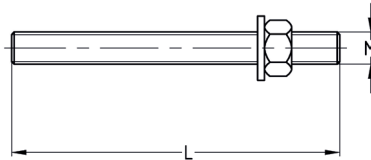

Anchor rod for solid and perforated blocks type VMU-A, strength class 5.8

#### Features



Size	Type	Solid block without perforated sleeve		Solid and perforated block with perforated sleeve		External thread M	Length L [mm]	Surface galvanised Part no.	Surface V4A Part no.	Sales unit	Pack unit
		Drilling diameter x depth [mm]	Clamping thickness t <sub>fix</sub> [mm]	Drilling diameter x depth [mm]	Clamping thickness t <sub>fix</sub> [mm]						
M8 x 100 mm	VMU-A	10 x 80	10	12 x 80	10	M8	100	106277	106276	10	Pieces
M8 x 130 mm			40		40		130	106281			
M10 x 110 mm		12 x 90	10	16 x 85	15	M10	110	106253	106252		
M10 x 150 mm			50		55		150	106257	106256		
M10 x 165 mm			65		70		165	106259	106258		
M12 x 135 mm		14 x 90	20	20 x 85	35	M12	135	163163	163165		
M12 x 175 mm			60		75		175	163164			

**!** Anchor rods in additional dimensions, threaded rods type VM-A with inspection certificate 3.1 according to EN 10204 as well as highly corrosion resistant threaded rods in stainless steel HCR available upon request.

**i** Please refer to chapter „Technical information“ for load values and consumption quantities for mortar when used in solid and perforated blocks.

