




Anchor rods with internal thread for injection anchors XV Plus


for solid and perforated blocks

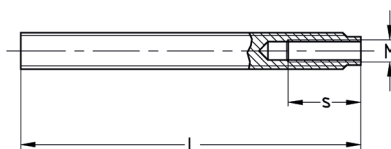

Anchor rod for solid and perforated blocks type VMU-IG, strength class 5.8

Features										
Size	Type	Solid block without perforated sleeve Drilling diameter x depth [mm]	Solid and perforated block with perforated sleeve Drilling diameter x depth [mm]	Inner thread M	Screw-in depth s [mm]	Length L [mm]	Outer diameter [mm]	Surface galvanised Part no.	Sales unit	Pack unit
M8 x 80 mm	VMU-IG	-	20 x 85	M8	8 - 20	80	12	167100	10	Pieces
M8 x 100 mm		14 x 100	-			100		167102		

 Anchor rods in additional dimensions, threaded rods type VM-A with inspection certificate 3.1 according to EN 10204 as well as highly corrosion resistant threaded rods in stainless steel HCR available upon request.

 Please refer to chapter „Technical information“ for load values and consumption quantities for mortar when used in solid and perforated blocks.

