


Anchor rods for injection anchors XV Plus

for cracked and non-cracked concrete

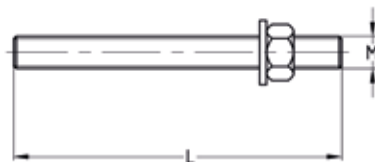


Anchor rod for solid and perforated blocks type VMU-A, strength class 5.8

Features



| Size | Type | Drilling diameter x depth [mm] | Clamping thickness t_{fix} [mm] | External thread M | Length L [mm] | Surface galvanised Part no. | Surface V4A Part no. | Sales unit | Pack unit |
|--------------|-------|--------------------------------------|---|----------------------|---------------------|-----------------------------------|----------------------------|------------|-----------|
| M8 x 100 mm | VMU-A | 10 x 80 | 10 | M8 | 100 | 106277 | 106276 | 10 | Pieces |
| M8 x 130 mm | | | 40 | | 130 | 106281 | | | |
| M10 x 110 mm | | 12 x 90 | 10 | M10 | 110 | 106253 | 106252 | | |
| M10 x 150 mm | | | 50 | | 150 | 106257 | 106256 | | |
| M10 x 165 mm | | | 65 | | 165 | 106259 | 106258 | | |
| M12 x 135 mm | | 14 x 90 | 20 | M12 | 135 | 163163 | 163165 | | |
| M12 x 175 mm | | | 60 | | 175 | 163164 | | | |

 Anchor rods in additional dimensions, threaded rods type VM-A with inspection certificate 3.1 according to EN 10204 as well as highly corrosion resistant threaded rods in stainless steel HCR available upon request.

 Please refer to chapter „Technical information“ for additional plug characteristic values.

