


## Pure aluminium self-adhesive tapes

## Application

- For adhesion of butt-joints of mineral wool pipe jackets with aluminium facing

## Your advantages

- Good adhesion on foils and laminations of aluminium
- Good adhesion even at low ambient temperatures up to 0 °C
- Can be taken simply and quickly from the roll

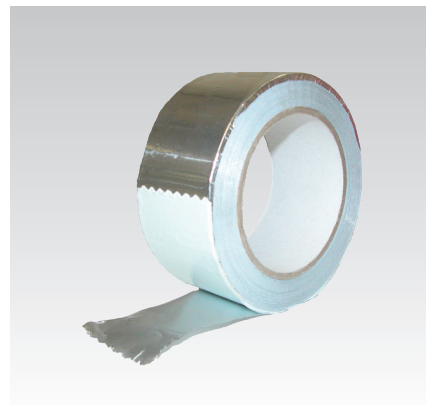

## Features

Material	Aluminum tape
Temperature range	-40 °C to +80 °C (up to +100 °C in the short term)
Fire classification	B1 acc. to DIN 4102 (flame resistant)
Vapour barrier permeability	< 1 g/m <sup>2</sup> in 24 h
Storage	20-25 °C max. 65 % air humidity
Adhesive force (steel) [N/cm]	8
Tearing strength [N/cm]	12
Tear expansion [%]	2

Width [mm]	Length [m]	Thickness [μm]	Part no.	Sales unit	Pack unit
50	100	30	141537	1	Roll
70			113554		

Felt tapes  
self-adhesive

Thickness [mm]	Width [mm]	Length [m]	Part no.	Sales unit	Pack unit
3	20	10	108835	1	Roll
	24		108837		
	30		108839		
	40		108840		
	70		108841		
	100		108834		

