

Zinc spray

can à 400 ml

Field of application

- Ideal for the patching of zinc coatings
- Suitable as zinc protection for welding points
- Subsequent zinc coating of cutting edges on channels

Advantages

- Layer thicknesses of up to 20 µm per working pass gives excellent corrosion protection
- Effective corrosion protection due to over 70 % zinc percentage in a dry film
- Also suitable for coating hot parts up to a temperature of 300 °C



Contents [ml]	Part no.	Sales unit	Pack unit
400	128579	1	pieces


Mounting adhesive tapes

Field of application

- Particularly suited for metals, glass, hard PVC, polycarbonate and ABS

Advantages

- Double-sided installation tape for the most rigorous requirements, with outstanding final bonding strength
- Weatherproof
- Plexiglas-compatible
- Resistant to softening agents
- Compatible with mirror lacquer

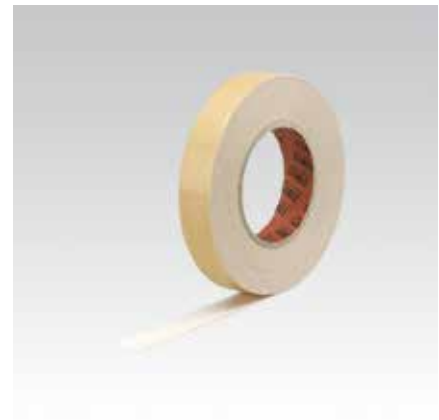

Features

Carrier	PE-Foam
Adhesive	Pure acrylate
Temperature range	-40 °C to +70 °C
Working temperature	+15 °C to +30 °C

Colour	Width [mm]	Length [m]	Thickness [mm]	Part no.	Sales unit	Pack unit
white	19	10	1	118450	1	roll

