

DÄMMGULAST® yellow

Field of application



- Ideal pipe clamp lining for vibration reduction

Advantages

- Average vibration reduction up to 22 dB(A) due to 6 mm cylindrical profile
- Prevents the occurrence of friction and stiction noises caused by thermal, axial expansion of the pipe
- Prevents the build-up of forces on the attachment due to the good rolling motion of the lining

- Clip-over edges prevent the lining from slipping out of the clamp
- Marked with the **yellow MÜPRO identification stripe**
- Silicone-free



	Size [mm]	Description	Length of roll [m]	Part no.	Sales unit	Pack unit	Dimensions [mm]		
							A	B	C
	20 x 6	3-string	30	107634	1	roll	6	3	20
	25 x 6	4-string		107656				4	25
	30 x 6			107659					30
	40 x 6	6-string		107681				6	40
	50 x 6	7-string		107682				10	50
	60 x 6	8-string		107683					60
	80 x 8	9-string		107684					80
								8	

DÄMMGULAST® Junior


Field of application



- Ideal pipe clamp lining for vibration reduction

Advantages

- Average vibration reduction up to 18 dB(A) due to 4.5 mm cylindrical profile
- Prevents the occurrence of friction and stiction noises caused by thermal, axial expansion of the pipe
- Prevents the build-up of forces on the attachment due to the good rolling motion of the lining

- Clip-over edges prevent the lining from slipping out of the clamp
- Marked with the **orange MÜPRO identification stripe**
- Silicone-free

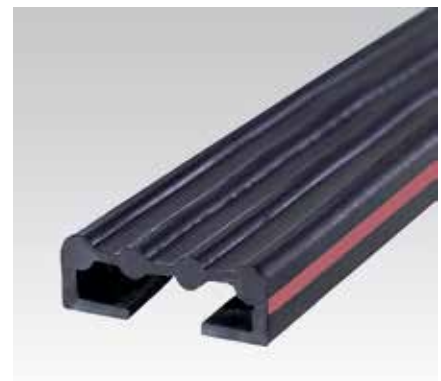

	Size [mm]	Description	Length of roll [m]	Part no.	Sales unit	Pack unit	Dimensions [mm]		
							A	B	C
	16 x 4.5	2-string	30	107956	1	roll	4.5	2	16
	20 x 4.5	3-string		107957				3	20
	25 x 4.5	4-string		107959				4	25

DÄMMGULAST® blue


Field of application



- Ideal pipe clamp lining acc. to fire classification B1 (DIN 4102)
- Also suitable for outdoor use

Advantages

- Fire-resistant and self-extinguishing, no burning drips
- **Fire classification B1 according to DIN 4102, no flammable dripping**
- Average vibration reduction up to 16.5 dB(A) due to 6 mm cylindrical profile

- Prevents the occurrence of friction and stiction noises caused by thermal, axial expansion of the pipe
- Prevents the build-up of forces on the attachment due to the good rolling motion of the lining
- Clip-over edges prevent the lining from slipping out of the clamp
- Marked with the **blue MÜPRO identification stripe**
- Silicone-free

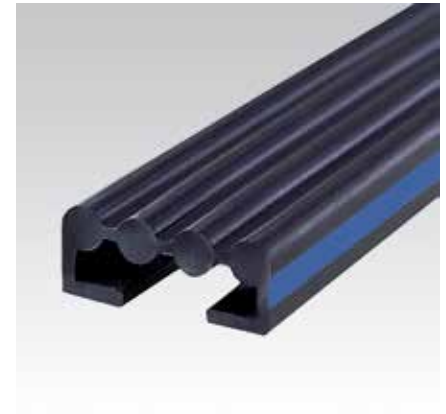

	Size [mm]	Description	Length of roll [m]	Part no.	Sales unit	Pack unit	Dimensions [mm]		
							A	B	C
	20 x 6	3-string	30	107524	1	roll	6	3	20
	25 x 6	4-string		107525				4	25
	30 x 6			107527					30
	40 x 6	6-string		107528				6	40
	50 x 6	7-string		107530				10	50

DÄMMGULAST® red

Field of application



- Ideal pipe clamp lining for high temperature range up to 200 °C

Advantages

- Average vibration reduction up to 24 dB(A) due to 6 mm cylindrical profile
- Temperature range from -60 °C to +200 °C
- Prevents the occurrence of friction and stiction noises caused by thermal, axial expansion of the pipe

- Prevents the build-up of forces on the attachment due to the good rolling motion of the lining
- Clip-over edges prevent the lining from slipping out of the clamp



	Size [mm]	Description	Length of roll [m]	Part no.	Sales unit	Pack unit	Dimensions [mm]		
							A	B	C
	20 x 6	3-string	30	108002	1	roll	6	3	20
	25 x 6	4-string		108003				4	25
	30 x 6			108005					30
	40 x 6	6-string		108006				6	40
	50 x 6	7-string		108008				10	50

DÄMMGULAST® seawater proof

Field of application



- Seawater resistant material, specially suitable for shipbuilding and off-shore applications

Advantages

- Average vibration reduction up to 20 dB(A) due to 6 mm cylindrical profile
- Prevents the occurrence of friction and stiction noises caused by thermal, axial expansion of the pipe

- Prevents the build-up forces on the attachment due to the good rolling motion of the lining
- Clip-over edges prevent the lining from slipping out of the clamp
- Silicone-free
- Vibration-control certified



	Size [mm]	Description	Length of roll [m]	Part no.	Sales unit	Pack unit	Dimensions [mm]		
							A	B	C
	20 x 6	2-string	30	108217	1	roll	6	3	20
	25 x 6	4-string		108218				4	25
	30 x 6	3-string		108219					30
	40 x 6	5-string		108220				6	40
	50 x 6	6-string		108221				8	50
	60 x 6	7-string		108222				10	60