


Betonschraube Typ MULTI-MONTI®-MMS-ST

DE - Montagekennwerte
 UK - Installation parameters
 FR - Caractéristiques de montage
 NL - Kengetallen voor montage
 ES - Coeficientes de montaje
 HU - Szerelési jellemzők
 CZ - Montážní parametry

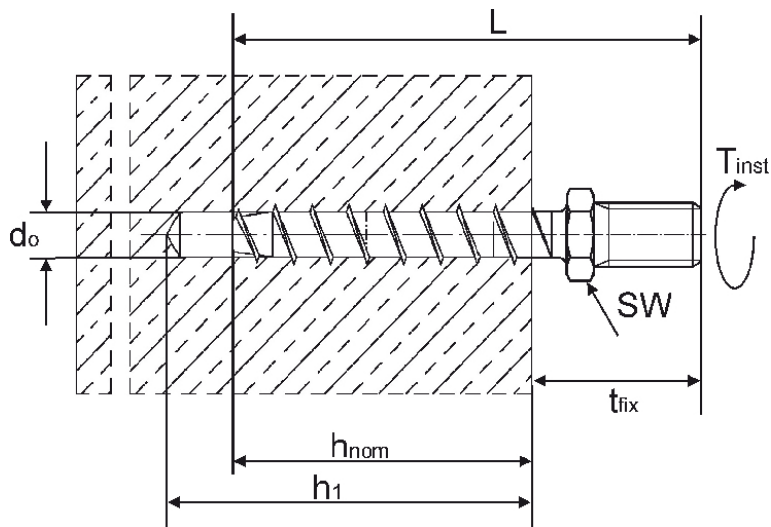

MÜPRO GmbH
 Hessenstraße 11
 65719 Hofheim-Wallau
 Deutschland
 Tel.: +49 (61 22) 80 80
 Fax: +49 (61 22) 47 02
www.muepro.de

Betonschraube Typ MULTI-MONTI®-MMS-ST

DE - Montagekennwerte

UK - Installation parameters


FR - Caractéristiques de montage


NL - Kengetallen voor montage

ES - Coeficientes de montaje

HU - Szerelési jellemzők

CZ - Montážní parametry

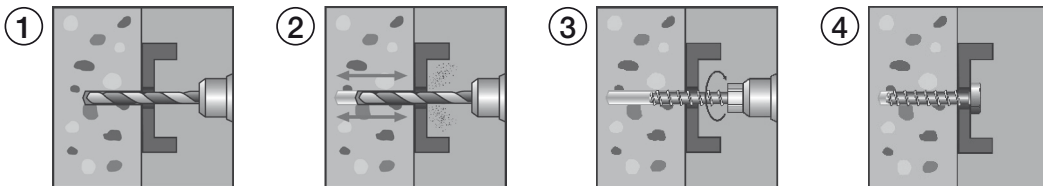

	Zulassung/ approval	L	t _{fix}	SW	d _f	h ₁	Ø d ₀	h _{nom}	T _{inst}
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[Nm]
MMS-ST 7,5 x 70 / 25	Z-21.1-1503	70	25	10	9	55	6	45	15
MMS-ST 7,5 x 80 / 25	ETA 05/0010	80	25	10	9	65	6	55	15
MMS-ST 7,5 x 100 / 45	ETA 05/0010	100	45						
MMS-ST 7,5 x 160 / 105	ETA 05/0010	160	105						
MMS-ST 10 x 80 / 35	Z-21.1-1503	80	35	13	12	65	8	55	40
MMS-ST 10 x 100 / 35	ETA 05/0010	100	35	13	12	75	8	65	40
MMS-ST 10 x 120 / 55	ETA 05/0010	120	55						

DE Bei kritischen Schraubfällen (Bewehrungskontakt) maximales Anzugsdrehmoment beachten/
UK The maximum tightening torque must be observed in critical screwing cases (reinforcement)

MÜPRO GmbH
Hessenstraße 11
65719 Hofheim-Wallau
Deutschland
Tel.: +49 (61 22) 80 80
Fax: +49 (61 22) 47 02
www.muepro.de