

MPC-Quick fasteners+

with internal thread, stainless steel










Application

- Secure and easy installation in slot of MPC-Support channel in order to attach mounting accessories
- For indoor and outdoor use

- Adjustment marks on the side facilitate its positioning in the support channel
- High quality and load capacity

Your advantages

- Time-saving attachment in the channel slot, even if subsequently fitted between existing pipe sections
- Simple and secure handling: insert in the MPC-Support channels - turn - and the MPC-Quick fastener is fixed. No slipping, no falling out

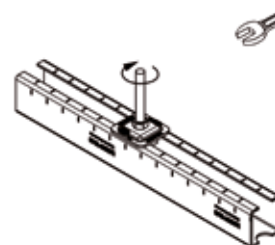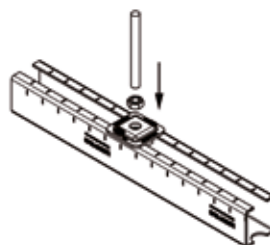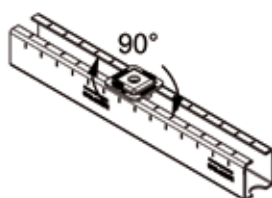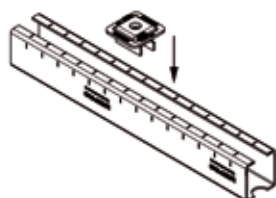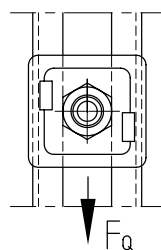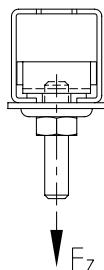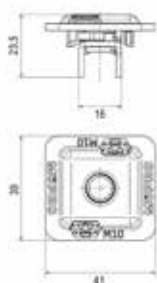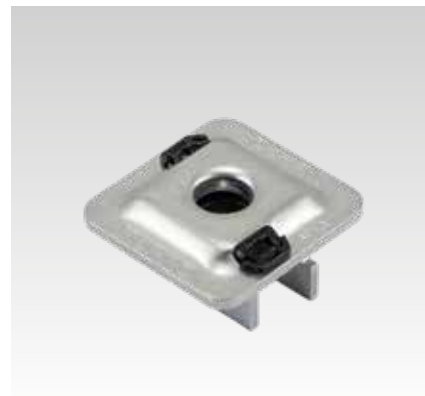

Features



For profiles	Connecting thread	Max. recommended tensile load F_z [N]	Max. recommended load lateral (displacement) F_q [N]	Tightening torque [Nm]
38/40	M8	2,800	200	9
	M10		300	17
40/60	M8	4,000	400	9
	M10			17

For profiles	Connecting thread	Material	Part no.	Sales unit	Pack unit
38/40, 40/60	M8	V2A	175465	50	Pieces
	M10		175466		