

MPC-Wall hanger supports

with vibration control, hot-dip galvanised

Field of application

- **For the vibration dampened attachment** of equipment such as ventilation and air conditioning devices, pumps, household water tanks, etc. on walls

Advantages

- Efficient mounting due to preassembled parts
- MPC-Support channels cut-to length and with holes on the rear side including MPC-Protection caps

- Various bracket lengths available (depending on device type)
- Simple height adjustment of the brackets due to sliding MPC-Hammer head bolts
- Variable adjustment of the mounting spaces on the bracket due to MPC-Rail nuts
- **Average vibration reduction of 17 dB(A) due to DÄMMGULAST® Resilient pads**



Features




Max. recommended load (set)
[N]

1,500

Complete kit consists of:

- 2 MPC-Support channels 38/40, length 520 mm
- 2 MPC-Wall hanger brackets 38/40
- 4 DÄMMGULAST® Resilient pads 43 x 11 mm
- 6 MPC-Protection caps for profile 38/40
- 4 MPC-Hammer head bolts M10/30
- 4 DÄMMGULAST® Washers 8.5 x 28 mm
- 4 Washers 8.5 x 28 x 1 mm
- 4 MPC-Rail nuts M8 for profile 38/40
- 4 Hexagon head bolts M8/55
- 4 MPC-Clamp brackets M10 for profile 38/40

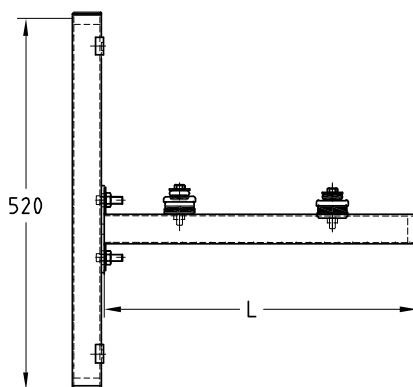

| Length L [mm] | Part no. | Sales unit | Pack unit |
|------------------|----------|------------|-----------|
| 480 | 113526 | 1 | pieces |
| 560 | 113529 | | |
| 640 | 113532 | | |

