

MPC-Saddle supports

hot-dip galvanised

Field of application

- Simple assembly of strong cross-beams using MPC-Support channels
- Applicable for cramped installation conditions in shafts and ducts
- Suitable for outdoor use

Advantages

- The vertical and horizontal holes in the base plate enable simple alignment of the MPC-Saddle support
- Good load transfer due to the high bending stiffness of the saddle connection
- Ideal connecting element for channel constructions



MPC-Saddle support, crosswise




MPC-Saddle support, lengthwise




MPC-Saddle support, lengthwise pre-assembled with double rail nut




MPC-Saddle support, lengthwise for profiles 38/80, 40/80 and 40/120

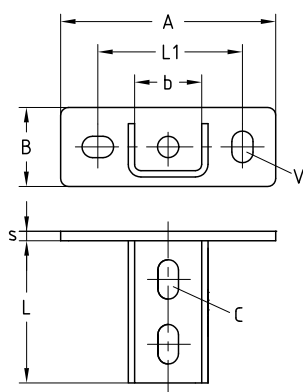

MPC-Saddle support, crosswise

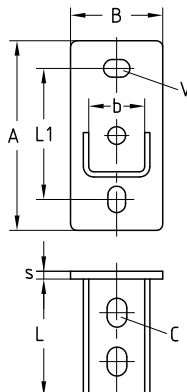

MPC-Saddle support, lengthwise

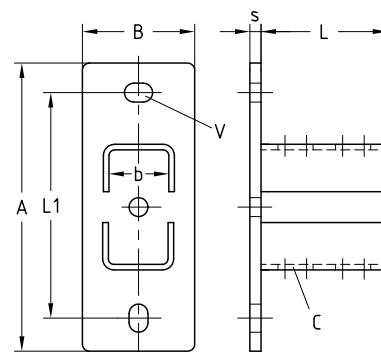

MPC-Saddle support, lengthwise for profiles 38/80, 40/80 and 40/120

Design	For support channels	Part no.	Sales unit	Pack unit	Dimensions [mm]							
					A	B	b	L	L1	s	C	V
Crosswise	38/40, 40/60	156820	25	pieces	136	50	42	90	91.5	6	13 x 25	13.5 x 20
Lengthwise		156819			144	70			100			
	38/80, 40/80	160982	1		205	80			160	8		
	40/120	153774			245				200			



Part no. 160982 and 153774 available upon request.