

### MPC-Wall hanger supports

with vibration control, galvanised

#### Field of application

- **For the vibration dampened attachment** of equipment such as ventilation and air conditioning devices, pumps, household water tanks, etc. on walls
- Galvanised version for use in dry interiors

#### Advantages

- Efficient mounting due to pre-assembled parts


- MPC-Support channels cut-to length and with holes on the rear side including MPC-Protection caps
- Various bracket lengths available (depending on device type)
- Simple height adjustment of the brackets due to sliding MPC-Hammer head bolts
- Variable adjustment of the mounting spaces on the bracket due to MPC-Rail nuts
- **Average vibration reduction of 17 dB(A) due to DÄMMGULAST® Resilient pads**



#### Features



Length L [mm]	Max. recommended load (set) [N]
480	1,500
560	
640	
800	1,200
1.040	0,900

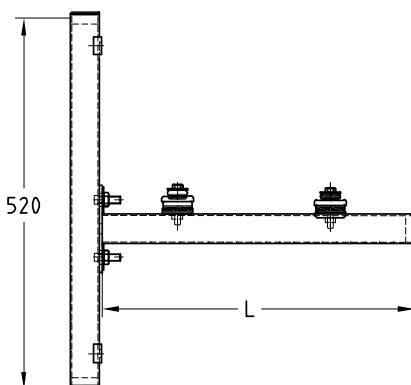

Complete kit consists of:

- 2 MPC-Support channels 38/40, length 520 mm
- 2 MPC-Wall hanger brackets 38/40
- 4 DÄMMGULAST® Resilient pads 43 x 11 mm
- 6 MPC-Protection caps for 38/40 profile
- 4 MPC-Hammer head bolts M10/30
- 4 DÄMMGULAST® Washers 8.5 x 28 mm
- 4 Washers 8.5 x 28 x 1 mm
- 4 MPC-Rail nuts M8 for 38/40 profile
- 4 Hexagon head bolts M8/55
- 4 MPC-Clamp brackets M10 for 38/40 profile

Length L [mm]	Part no.	Sales unit	Pack unit
480	113493	1	set
560	113511		
640	113517		
800	113523		
1.040	113487		