

VARIO-Swivel joints


galvanised

Field of application

- For bracing assembly in combination with rails and support channels
- For stiffening frame constructions
- For bracing assembly in combination with pipe clamps

Advantages

- Wide range of applications
- Infinitely angle adjustment for maximum flexibility during assembly
- Combinable with the MPC, MPR and MPT support channel systems
- Two versions for different applications

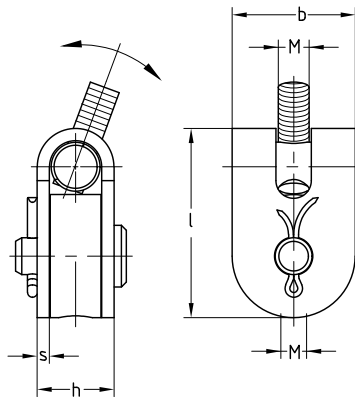

Features

Connecting thread M	Max. admissible tensile load [N]		
	0°	45°	90°
M10	11,500	3,700	3,500
M16	17,000	6,200	5,500



Connecting thread M	Part no.	Sales unit	Pack unit	Dimensions [mm]			
				b	h	s	L
M10	170448	10	pieces	40	24.5	4	65.8
M16	170449			50	36.5	6	86.8