

Girder clamps with joint



type Lindapter FLS, galvanised

Field of application

- For flexible attachment of hangers on inclined girders and flanges

Advantages

- For suspensions that cannot be achieved using conventional girder clamps
- Easy fitting using a hexagonal head clamping screw
- Rotatable about 360°
- High load transfer
- Approved by the FM and VdS for the suspension of sprinkler lines from girders inclined at an angle of up to 25°

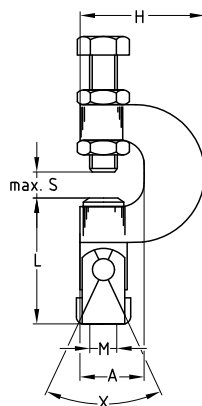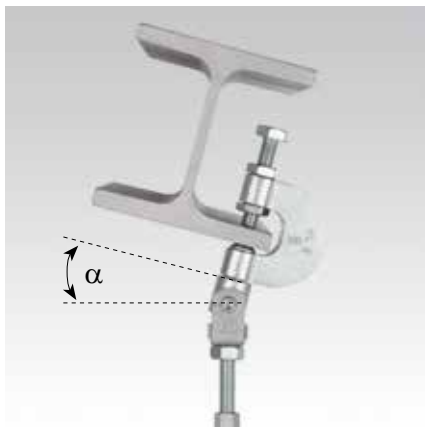

Features



Size	Max. permitted load [N] deflection angle		Tightening torque [Nm]
	$\alpha \leq 25^\circ$ VdS + FM	$25^\circ \leq \alpha \leq 45^\circ$	
M8	2,500	1,500	18
M10			



When fastening pipes bigger than DN 65, a safety steel strip must be used according to VdS certification.

Size	Part no.	Sales unit	Pack unit	Dimensions [mm]				
				A	H	L	M	S max.
M8	130262	10	pieces	27	53	55	M8	17
M10	130261						M10	

	Part no.	Sales unit	Pack unit
Safety steel strip , galvanised Length 300 mm, material 40 x 3.0 mm	163053	25	pieces