

### MPT-Guide




Type FGH, hot-dip galvanised

#### Application

- For fastening suspended MÜPRO pipe slides below subconstructions of MPT-Support profiles
- Suitable for guides with lift lock for installing suspended pipe slides
- Hot-dip galvanised version for indoor and outdoor use
- For pipe slides with a base plate up to 15 mm thick

#### Your benefits

- Guide angle set for simple installation of pipe slides on MPT-Profiles with or without slider to reduce reaction forces

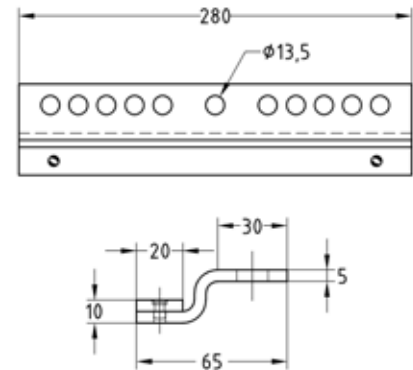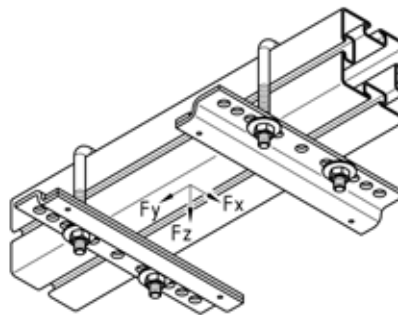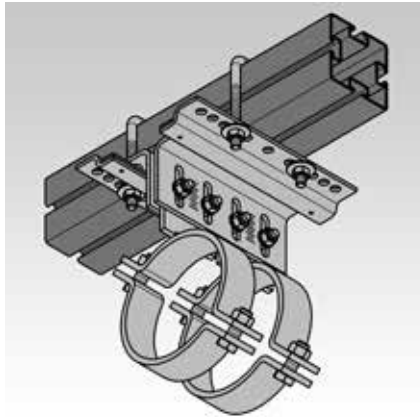

Type	For profiles	For thread	Load			Weight [kg/item]	Item no.	Delivery unit	Quantity unit
			$F_x$ [kN]	$F_y$ [kN]	$F_z$ [kN]				
Type FGH, with sliding plate	Q50–2.5, Q80–2.0, Q100–2.5, Q100–3.5, Q150–2.5	M12	–	±3.0	+8.0	1.626	168856	1	Set



You can find the appropriate threaded square U-bolts for fastening guide sets to MPT-Profiles in chapter "MPT-Support System".