


MPT-Saddle supports hot-dip galvanised

Field of application

- Stable saddle supports in three sizes for accommodating MPT-Support profiles Q50, Q80, Q100 or Q150 for wall, floor, and ceiling connection

Advantages

- For fast and efficient mounting of cross-beams of MPT-Support profiles
- Stable baseplate for safe fastening on the structural element
- Standardised hot-dip galvanising for flexible implementation outdoors and indoors
- Fully welded version of the grooved support saddle ensures high dimensional stability of the flange

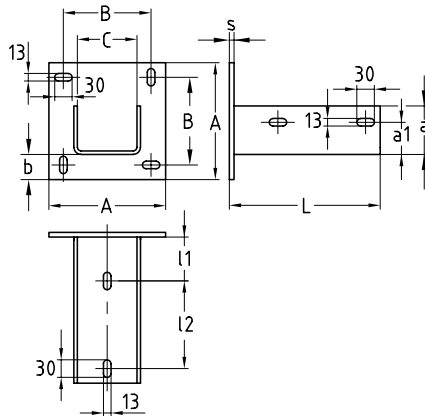

Max. load capacities:

For profile	Max. recommended tensile load F_z [N]	At tightening torque T_{inst} [Nm]
Q50-2.5	12,500	65
Q80-2.0		
Q100-2.5, Q100-3.5, Q150-2.5	15,000	

For profile	Part no.	Sales unit	Pack unit	Weight [kg/piece]	Dimensions [mm]									
					A	B	C	s	b	L	a1	a	l1	l2
Q50-2.5	131837	1	pieces	4.850	200	150	102	8	72	258	37	57	75	150
Q80-2.0	167934			4.478	180	130	82		43		47	73		
Q100-2.5, Q100-3.5, Q150-2.5	131635			5.550	200	150	102		54		83			