

MPT-Support profile connectors

hot-dip galvanised

Field of application


- Axial connection of MPT-Support profiles

Advantages


- Safe and form-locking connection of MPT-Support profiles by inserting the support profile connection into the ends of the support profiles to be connected (Q80 and Q150) or by connecting from outside (Q100)
- High corrosion protection due to standardised hot-dip galvanising ensures flexible implementation outdoors and indoors



For profile Q80

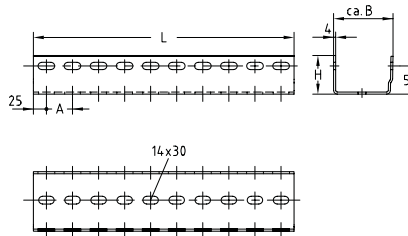

For profile Q100

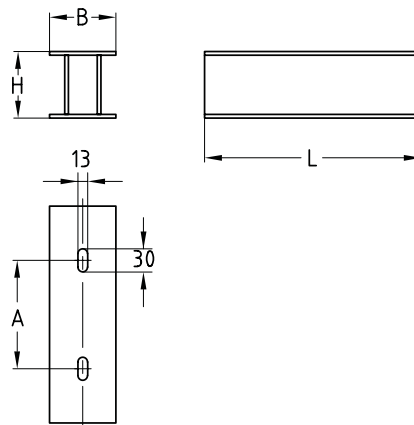

For profile Q80, Q150
schematic sketch
(original may vary)



For profile Q150

For profile	Length L [mm]	Part no.	Sales unit	Pack unit	Weight [kg/piece]	Dimensions [mm]		
						A	B	H
Q80-2.0	550	167938	1	pieces	3,239	150	73	73
Q100-2.5, Q100-3.5	500	176056		set	7,14	50	115	74
Q150-2.5	550	167077		pieces	9,25	150	92	140

 Article 176056 is supplied in a set with two U-profiles.