

MPT-VARIO joints


galvanised

Field of application

- Reinforced joint angles for corner and angle connections as well as for bracing in combination with MPT-Support profiles Q50, Q80, Q100 and Q150
- Additional connection options due to fourfold perforation

Advantages

- Flexible connecting element for connecting MPT-Support profiles with any connection angles
- Any tolerances that may occur can be compensated due to oblong holes in mounting angles

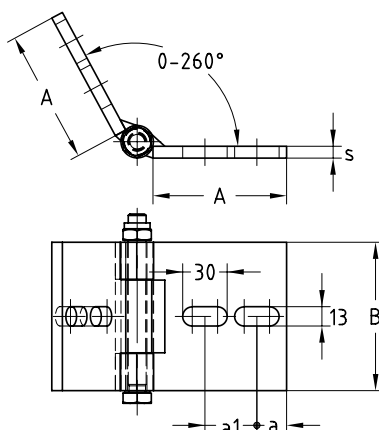

Features

Design	Max. recommended load [N]
	5,000
	7,500
	10,000

For profile	Thickness s [mm]	Part no.	Sales unit	Pack unit	Weight [kg/piece]	Dimensions [mm]			
						A	B	a	a1
Q50-2.5, Q100-2.5, Q100-3.5, Q150-2.5	8	166944	1	pieces	1.390	90	100	20	35
Q80-2.0		167939			1.095		80	22	38