

Duo galvanised

Field of application

- Suitable for fixings in industrial areas
- Suitable for fastening of drinking water and heating pipes
- For indoor use

Advantages

The easy to install quick fastening enables the efficient pipe support in any position:


- Quick and reliable snapping in of the fastener once the clamp is closed, holding the pipe securely
- The easy to swivel lower clamp half allows opening and closing of the pipe clamp with only one hand
- Captive fastening bolts
- Wide opening of the clamp due to the swivelling ability of the lower clamp half
- Low vibration entry and exit areas due to the ribbed profile of the DÄMMGULAST® Lining
- Connection thread M8/M10 for suspended, floor or wall mounting
- DÄMMGULAST® vibration control lining with green identification stripe: average sound level improvement up to 18 dB(A)



Features



Size	Max. recommended load [N]
12 mm–2"	700
70 mm–4"	1,000

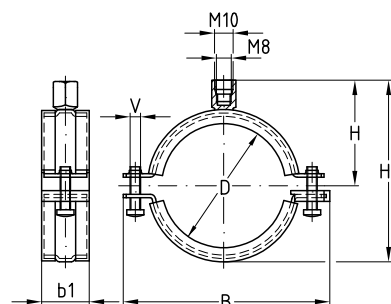

Connecting thread	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]				
	[inch]	[mm]					B	b1	H1	H	V
M8/M10		12	12–15	142938	100	pieces	45	22.5	38	28	M5
	3⁄8		15–19	142939			51		44	30	
	1⁄2		20–25	142940			57		50	33	
	3⁄4		25–30	142941			63		56	37	
	1		33–37	142942			70		64	40	
	1¼		42–46	142943			80		72	45	
	1½		47–52	142944			86		79	48	
		57	54–58	142945			91		84	50	
	2		59–63	142946	96		88	53	M6		
		70	68–73	142947	118		104	60			
	2½		72–80	142948	127		113	65			
		83	82–85	142949	132		119	68			
	3		89–92	142950	139		125	71			
		102	99–103	142951	151		137	77			
		110	108–112	142952	160		145	81			
	4		112–118	142953	164		149	83			