

### OPTIMAL Junior® Easy with DÄMMGULAST®, galvanised

#### Field of application

- Suitable for pipe attachments in industrial areas
- Suitable for fastening of drinking water and heating pipes
- For indoor use

#### Advantages


- Practical latching fastener
- The pipe is free to move during the installation
- Quick installation due to the single fastening bolt
- Captive fastening bolt
- The connection thread M8 facilitates the installation close to the building structure
- DÄMMGULAST® vibration control lining with green identification stripe: average sound level improvement up to 17 dB(A)



#### Features



Size	Max. recommended load [N]
¼" - 1½"	700
55 mm - 3"	800
102 mm - 4"	1.200

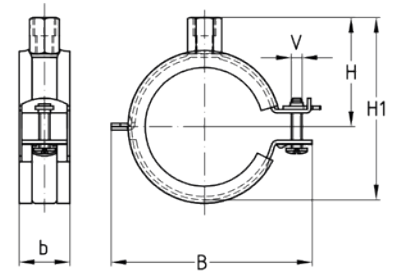

Connecting thread	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]				
	[Zoll]	[mm]					B	b	H1	H	V
M8	¼		12-14	175045	150	pieces	41	20	34	21	M5
			15-19	175046			45		38	23	
	½		21-23	175047	100		50		42	25	
			26-28	175048			50		47	28	
	1		32-35	175049	50		61		54	31	
			40-43	175050			69		62	35	
	1½		48-51	175051			77		70	39	
			52-56	175052			85		76	42	
		55	57-61	175053			89		80	44	
M8/M10	¼		12-14	175124	150	41	23	43	30		
			15-19	175125		45		47	32		
	½		21-23	175126	100	50		51	34		
			26-28	175127		50		56	37		
	1		32-35	175128	50	61		63	40		
			40-43	175129		69		71	44		
	1½		48-51	175130		77		79	48		
			52-56	175131		85		85	51		
		55	57-61	175132		89		89	53		
		65	63-67	175054		94		94	56		
			70-73	175055		102		102	60		
	2½		74-80	175056		108		109	63		
			83-91	175057		119		120	69		
3		101-106	175058	25	139	139	78				
		108-114	175059		147	147	82				