

Filbow clamps with cup nut galvanised

Field of application

- For fastening sprinkler pipes as per VdS and FM Guidelines

Advantages

- One-piece design allows quick and easy installation of sprinkler pipes
- Approved by VdS and FM


- Ideal for suspension using threaded pins and threaded rods
- Easy height adjustment on a threaded rod or threaded pin



Features



Size	Max. recommended load [N]
½"-2"	4,000
2½"-4"	6,000
5"-6"	8,000
8"	10,000
10"	11,000

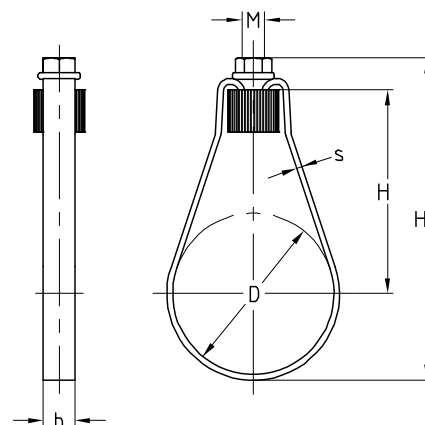

Connecting thread	Size [inch]	For pipe outer-Ø [mm]	VdS	FM	Part no.	Sales unit	Pack unit	Dimensions [mm]			
								b	s	H	H1
M8	½	21.3	●		153204	50	pieces	12	1.5	56	76
	¾	26.9	●		153205					57	80
	1	33.7	●		153207						83
	1¼	42.4	●		153209						88
	1½	48.3	●		153211					62	96
	2	60.3	●		153213					72	112
M10	¾	26.9	●	●	153206	25	pieces	15	2.5	57	82
	1	33.7	●	●	153208						85
	1¼	42.4	●	●	153210						90
	1½	48.3	●	●	153212					62	98
	2	60.3	●	●	153214					72	114
	2½	76.1	●	●	153215					89	140
	3	88.9	●	●	153216					104	161
	4	114.3	●	●	153217					135	205
M12	5	139.7	●	●	153218	15	pieces	20	3.0	151	235
	6	168.3	●	●	153219					188	287
M16	8	219.1	●	●	153220					236	364
M20	10	273.0	●		153221					307	470