

Single bossed clamps

with connection socket and DÄMMGULAST® yellow, galvanised

Field of application

- Suitable for pipelines with dynamic loads in combination with expansion points
- Suitable for fixings in industrial areas
- Specially suitable for standing fixings
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Advantages

- Proven, two-piece single bossed clamp in heavy-duty design
- For bending-resistant fastening at greater distances from the building structure
- Ideal combination when used with pipe nipple and base plate or socket adapter
- DÄMMGULAST® vibration control lining with yellow identification stripe: average sound level improvement up to 22 dB(A)




This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) and is submitted to controls according to RAL-GZ 655-B



Features

Size	Max. recommended load [N]
3/8"-2"	1,700
70-83 mm	2,200
3"-6"	2,900
170-200 mm	3,500

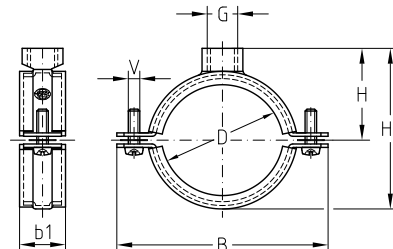

Connecting thread G [inch]	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]					
	[inch]	[mm]					B	b1	H1	H	V	
½	⅜		14–20	154944	100	pieces	64	23	64	44.5	M6 x 20	
	½		21–26	154945			71		70	47.5	M6 x 25	
	¾		26–30	154946			75		74	49.5		
	1		31–38	154947			81		80	52.5		
	1¼		40–47	154948			91		90	57.5		
	1½		48–54	154949			100		98	61.5		
		57	54–60	154950	50		105	28	103	64.0	M8 x 35	
	2		60–66	154951			111		109	67.0		
		70	68–73	154816			126		118	71.5		M8 x 35
	2½		73–80	154817			131		123	74.0		
		83	82–87	154818			142		133	79.0	M8 x 40	
	3		87–94	154819			146		137	81.0		
		102	99–104	154820			157		148	86.5		
		110	105–112	154821			166		157	91.0		
	4		112–118	154822			172		163	94.0		
		125	122–128	154823			182		173	99.0		
		133	132–137	154824			191		182	103.5		
	5		137–142	154825			196		187	106.0		
		144	142–148	154826			202		193	109.0		
		150	149–156	154827			210		201	113.0		
		160	159–164	154828			218		209	117.0		
	6		164–169	154829			223		214	119.5		
		170	169–172	154830			225		216	120.5		
		180	177–183	154831	25		235		227	126.0		
		200	197–203	154832			256		247	136.0		

Single bossed clamps

with connection socket and DÄMMGULAST® yellow, galvanised



Connecting thread G [inch]	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]				
	[inch]	[mm]					B	b1	H1	H	V
¾	1½		48–54	154952	50	pieces	100	23	102	65.5	M6 x 25
		57	54–60	154953			105		107	68.0	
	2		60–66	154954			111		113	71.0	
		70	68–73	154833			126	28	122	75.5	M8 x 35
	2½		73–80	154834			131		127	78.0	
		83	82–87	154835			142		137	83.0	
	3		87–94	154836			146		141	85.0	M8 x 40
		102	99–104	154837			157		152	90.5	
		110	105–112	154838			166		161	95.0	
	4		112–118	154839			172		167	98.0	
		125	122–128	154840			182		177	103.0	
		133	132–137	154841			191		186	107.5	
	5		137–142	154842			196		191	110.0	
		144	142–148	154843			202		197	113.0	
		150	149–156	154844			210		205	117.0	
		160	159–164	154845			218		213	121.0	
	6		164–169	154846			223		218	123.5	
		170	169–172	154847			225		220	124.5	
		180	177–183	154848	25		235		231	130.0	
		200	197–203	154849			256		251	140.0	