

Single bossed clamps

with connecting socket, without lining, galvanised

Field of application

- Applicable as a pipeline anchor point
- Suitable for fixings in industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Advantages

- Proven, two-piece single bossed clamp in heavy-duty design
- For bending-resistant fastening at greater distances from the building structure
- Ideal combination when used with pipe nipple and base plate or socket adapter




This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) and is submitted to controls according to RAL-GZ 655-B



Features

Size	Max. recommended load [N]
¾"-70 mm	1,900
2½"-174 mm	4,400
179-210 mm	5,000

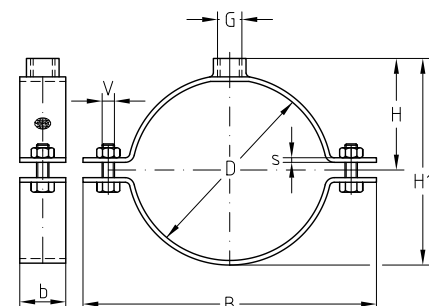

Connecting thread G [inch]	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]				
	[inch]	[mm]					B	b	H1	H	V
½	¾		26–30	154977	100	pieces	64	20	64	44.5	M6 x 20
	1		31–37	154978			71		70	47.5	
		40	38–41	154979	50		75		74	49.5	M6 x 25
	1¼	42.4	42–46	154980			81		80	52.5	
	1½		47–52	154981			87		85	55.0	
		57	53–57	154982			91		90	57.5	
	2		58–63	154983			100		98	61.5	
		70	64–71	154984			105		103	64.0	M8 x 35
	2½		72–78	154931			120	25	112	68.5	
		83	79–85	154932			126		118	71.5	
	3		85–90	154933			131		123	74.0	M8 x 40
		102	99–104	154934			146		137	81.0	
	4		108–115	154935			157		148	86.5	
		122	118–123	159190			166		157	91.0	
		125	125–130	154936			172		163	94.0	
	5		133–140	154937			182		173	99.0	
		147	142–148	159191			191		182	103.5	
		152	148–153	159192			196		187	106.0	
		160	154–160	154938			202		193	109.0	
	6		160–169	154939			210		201	113.0	
		174	170–175	154940			218		209	117.0	



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

Single bossed clamps

with connecting socket, without lining, galvanised

Connecting thread G [inch]	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]				
	[inch]	[mm]					B	b	H1	H	V
½		179	175–180	154941	50	pieces	223	25	214	119.5	M8 x 40
		190	187–194	154942	25		235		227	126.0	
		210	206–214	154943			256		247	136.0	
¾	1½		47–52	154985	50		86	20	85	55.0	M6 x 25
		57	53–57	154986			91		90	57.5	
	2		58–63	154987			100		102	65.5	
		70	64–71	159203			105		107	68.0	
	2½		72–78	154918			120	25	116	72.5	M8 x 35
		83	79–85	154919			126		122	75.5	
	3		85–90	154920			131		127	78.0	
		102	99–104	154921			146		141	85.0	M8 x 40
	4		108–115	154922			157		152	90.5	
		122	118–123	159206			166		161	95.0	
		125	125–130	154923			172		167	98.0	
	5		133–140	154924			182		177	103.0	
		147	142–148	159207			191		186	107.5	
		152	148–153	159208			196		191	110.0	
		160	154–160	154925			202		197	113.0	
	6		160–169	154926			210		205	117.0	
		174	170–175	154927			218		213	121.0	
		179	175–180	154928			223		218	123.5	
		190	187–194	154929	25		235		231	130.0	
		210	206–214	154930			256		251	140.0	



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.