

### Single bossed clamps with DÄMMGULAST® blue, galvanised

#### Field of application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for fixings in housing and industrial areas
- Suitable for fixings in industrial areas as well as in air-conditioning, ventilation and sanitary areas
- For indoor use

#### Advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustments to accommodate a greater variation in pipe diameter
- Vibration control lining DÄMMGULAST® with blue identification stripe: **Fire classification B1 according to DIN 4102, no flammable dripping**

- Average sound level improvement up to 16.5 dB(A)
- Tightening bolts with combination cross-head convenient for power-driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp


 This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B



#### Features



Size	Max. recommended load [N]
3/8"-2"	1,500
70-83 mm	2,200
3"-6"	2,900
170-200 mm	3,200
212-225 mm	5,800

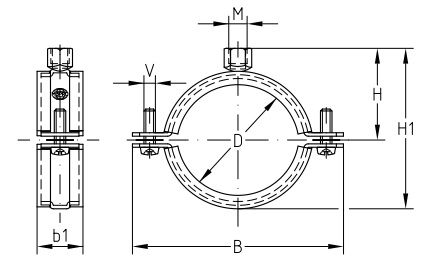

Connecting thread	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]				
	[inch]	[mm]					B	b1	H1	H	V
M8/M10	3/8"	20	14-20	151466	100	pieces	64	23	55	35.5	M6 x 20
			21-26	151467			71		61	38.5	
	26-30	151468	75	65			40.5				
	31-38	151469	81	71			43.5				
	1 1/2"	38	40-47	151471	50		91	28	81	48.5	M6 x 25
			48-54	151472			100		89	52.5	
	54-60	151473	105	94			55.0				
	60-66	151474	111	100			58.0				
	2"	51	68-73	151476			126	28	109	62.5	M8 x 35
			73-80	151477			131		114	65.0	
	82-87	151478	142	124			70.0				
	87-94	151479	146	128			72.0				
	3"	76	99-104	151480			157	28	139	77.5	M8 x 40
			105-112	151481			166		148	82.0	
	112-118	151482	172	154			85.0				
	122-128	151483	182	164			90.0				
	4"	102	132-137	151484			191	28	173	94.5	
			137-142	151485			196		178	97.0	
	142-148	151486	202	184			100.0				
	149-156	151487	210	192			104.0				
5"	127	159-164	151488			218	28	200	108.0		
		164-169	151489			223		205	110.5		
169-172	151490	225	207			111.5					




Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

### Single bossed clamps with DÄMMGULAST® blue, galvanised



Connecting thread	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]								
	[inch]	[mm]					B	b1	H1	H	V				
M10/M12	3/8		14–20	151491	100	pieces	64	23	60	40.5	M6 x 20				
	1/2		21–26	151492			71		66	43.5					
	3/4		26–30	151493			75		70	45.5					
			31–38	151494	50		81	28	76	48.5	M6 x 25				
	1		40–47	151496			91		86	53.5					
	1 1/2		48–54	151497			100		94	57.5					
		57	54–60	151498			105		99	60.0					
	2		60–66	151499			111		105	63.0					
		70	68–73	151501			126		114	67.5		M8 x 35			
	2 1/2		73–80	151502			131		119	70.0					
		83	82–87	151503			142		129	75.0					
	3		87–94	151504			25			146		46	133	77.0	M8 x 40
		102	99–104	151505						157			144	82.5	
		110	105–112	151506	166	153		87.0							
	4		112–118	151507	172	159		90.0							
		125	122–128	151508	182	169		95.0							
		133	132–137	151509	191	178		99.5							
	5		137–142	151510	196	183		102.0							
		144	142–148	151511	202	189		105.0							
		150	149–156	151512	210	197		109.0							
		160	159–164	151513	218	205		113.0							
	6		164–169	151514	50		223	28	210	115.5	M8 x 40				
		170	169–172	151515			225		212	116.5					
	180	177–183	151516	235			223		122.0						
	200	197–203	151517	256			243		132.0						
	212	208–214	151518	284			256		138.5	M10 x 40					
8		217–225	151519	295	267	144.0									
	225	225–232	151520	304	274	147.5									
M12/M16/ 1/2" ET	5		137–142	151521	50		196	28	187	106.0	M8 x 40				
		144	142–148	151522			202		193	109.0					
		150	149–156	151523			210		201	113.0					
		160	159–164	151524			218		209	117.0					
	6		164–169	151525			223		214	119.5					
		170	169–172	151526	25		225	46	216	120.5	M10 x 40				
		180	177–183	151527			235		227	126.0					
		200	197–203	151528			256		247	136.0					
		212	208–214	151529			284		260						
	8		217–225	151530			295		271	142.5					
	225	225–232	151531	304	278	148.0									

 Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.