

VARIO-Twin pipe clamps galvanised


Field of application

- Ideal for parallel pipes
- Ideal as support for risers or suspended pipes
- Ideal for good appearance as the safety fastener is on the inside
- Suitable for attachment of pipelines in residential and industrial constructions
- For indoor use


Advantages

- Twin clip has the fastening advantages of the safety clip

- Safety fastener without fastening screws
- Distance between pipe axes is adjustable
- Markings facilitate the distance adjustments
- Allows combination of different pipe diameters on one twin clip
- Efficient support for 2 pipes with one anchor plug
- DÄMMGULAST® vibration control lining with green identification stripe: average sound level improvement up to 18 dB(A)

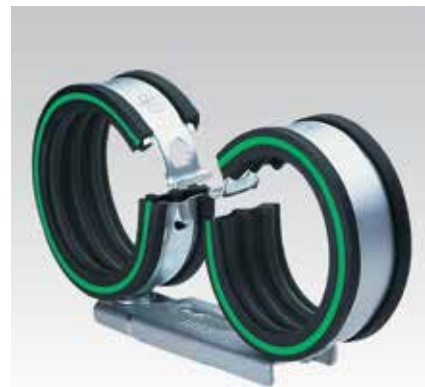

! The mounting distance of the pipe from the structure element is determined by the selection of the appropriate bolt screw length. The distance can be adjusted by means of the nut and locknut. The fitting of the VARIO-Twin bracket by means of **anchors** enables the distance from the structure **to be continuously adjusted** while maintaining flexural rigidity.

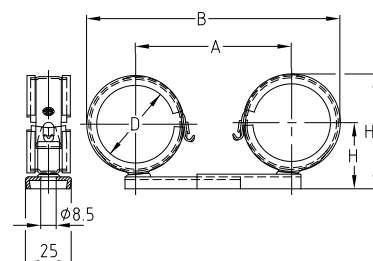

Features



Suitable for	Size		Part no.	Sales unit	Pack unit	Dimensions [mm]				
	[inch]	[mm]				H1	H	B	Adjustment range A	
Copper pipes		10	107299	100	pieces	30	21	23+A	40–80	
		12	107300			32	22			
		15	107301			35	24	28+A		
		18	107302			38	25	31+A		
		20	107303			40	26			
		22	107304			42	27	35+A		
		24	107305			44	28	37+A		
		28	107306	50		48	30	42+A	50–95	
		30	107309			50	31	46+A		
		33	107310			53	33			
		35	107311			55	34			
		42	107312			62	37	56+A		60–105
		43	107313			63	38			
Steel pipes	¾		107308	100		38	25	31+A	40–80	
	½		107298			42	27	35+A		
	¾		107307			47	30	41+A		50–95
	1		107295	50		54	33	46+A		
	1¼		107297			63	38	56+A	60–105	
	1½		107296			69	41	63+A		