

Pipe slides type LP-2

with two pipe clamps, DIN 3567

Field of application

- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For insulation thicknesses up to 80 mm

Advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate upon request
- Also available in stainless steel as well as in primer coated version upon request



Nominal size DN	Pipe outer diameter D1 [mm]	Part no.		Sales unit	Pack unit
		W37-OR-SG	W37-OF-SF		
175	191.0	116257	116209	1	pieces
	193.7	116263	116212		
200	216.0	116269	116215		
	219.1	116275	116218		
250	267.0	116281	116221		
	273.0	116287	116224		
300	315.0	116293	116227		
	323.9	116299	116230		
350	355.6	116306	116233		
	368.0	116312	116236		
400	406.4	116318	116239		
	419.0	116324	116242		
500	508.0	116330	116245		
	521.0	116336	116248		
600	610.0	116342	116251		

Pipe slide material	Pipe slide code	Pipe slide surface	Code for surface	Bolts and nuts	Code for bolts and nuts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF


Ordering example: L-section slide guide made from S235JR (St37) with 2 pipe clamps, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outer diameter of 267 mm.

Part no: 116221 Type: LP-2-W37-OF-SF-267.0



Pipe guide with polyamide sliding surface as well as other versions available upon request.

Pipe slides type LP-2 with two pipe clamps, DIN 3567

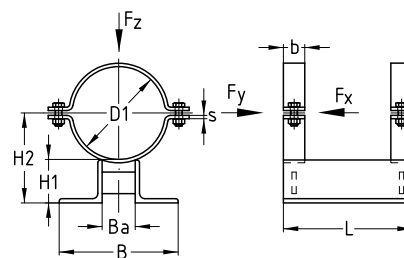

Nominal size DN	Pipe outer diameter D1 [mm]	Dimensions [mm]							Loading			Weight [kg/piece]
		s	b	L	B	Ba	H1	H2	F _x [kN]	F _y [kN]	F _z [kN]	
175	191.0	8	50	300	269	69	102	198	10.0	10.0	20.0	14.740
	193.7				270	70		199				14.800
200	216.0				277	77		101				209
	219.1				278	78	211		10.5	10.5	21.0	15.300
250	267.0		60		294	94	100	233	11.2	11.2	22.4	18.210
	273.0				296	96		236				18.330
300	315.0				310	110		99				256
	323.9				313	113	98	260				19.600
350	355.6				324	124	97	275				20.870
	368.0				328	128		281				21.320
400	406.4	10	70		342	142	98	301	13.1	13.1	26.2	28.580
	419.0				346	146	97	307				29.070
500	508.0				376	176	95	349	14.5	14.5	29.0	32.150
	521.0				380	180		355				32.780
600	610.0				410	210	92	397	14.9	14.9	29.8	36.170