

### Pipe slides type TP-2

with two pipe clamps, DIN 3567

#### Field of application

- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For insulation thicknesses up to 75 mm for type TP80-2
- For insulation thicknesses up to 90 mm for type TP100-2

#### Advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate upon request
- Also available in stainless steel as well as in primer coated version upon request




	Nominal size DN	Pipe outer diameter D1 [mm]	Part no.		Sales unit	Pack unit
			W37-OR-SG	W37-OF-SF		
T-Profile 80	25	33.7	117023	116960	1	pieces
	32	42.4	117026	116969		
	40	48.3	117029	116972		
	50	60.3	117032	116978		
	65	76.1	117035	116984		
	80	88.9	117038	116990		
	100	114.3	117008	116930		
	125	139.7	117011	116936		
	150	168.3	117014	116942		
	(175)	193.7	117017	116948		
T-Profile 100	25	33.7	116784	116716	1	pieces
	32	42.4	116787	116722		
	40	48.3	116790	116727		
	50	60.3	116793	116733		
	65	76.1	116796	116739		
	80	88.9	116799	116745		
	100	114.3	116769	116686		
	125	139.7	116772	116692		
	150	168.3	116775	116698		
	(175)	193.7	116778	116704		
	200	219.1	116781	116710		


Pipe slide material	Pipe slide code	Pipe slide surface	Code for surface	Bolts and nuts	Code for bolts and nuts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF

**Ordering example:** T-section slide guide made from S235JR (St37) with 2 pipe clamps, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outer diameter of 60.3 mm.

**Part No. 116733 Type: TP100-2-W37-OF-SF-60.3**

 Pipe guide with polyamide sliding surface as well as other versions available upon request.

### Pipe slides type TP-2 with two pipe clamps, DIN 3567

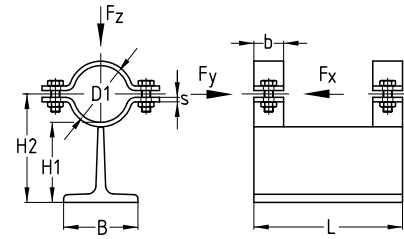

	Nominal size DN	Pipe outer diameter D1 [mm]	Dimensions [mm]						Loading			Weight [kg/piece]	
			s	b	L	B	H1	H2	F <sub>x</sub> [kN]	F <sub>y</sub> [kN]	F <sub>z</sub> [kN]		
T-Profile 80	25	33.7	5	30	200	80	85	102	1.1	1.1	2.2	2.800	
	32	42.4						106	1.2	1.2	2.4	2.860	
	40	48.3						109	1.4	1.4	2.8	2.910	
	50	60.3	6	40			86	116	2.3	2.3	4.6	3.550	
	65	76.1						124	2.5	2.5	5.0	3.710	
	80	88.9						130	2.8	2.8	5.6	3.890	
	100	114.3	8	50			250	88	145	5.0	5.0	10.0	5.930
	125	139.7							158	5.2	5.2	10.4	6.320
	150	168.3							172				7.360
	(175)	193.7							185	5.4	5.4	10.8	8.040
	200	219.1							198				8.490
T-Profile 100	25	33.7	5	30	200	100	105	122	0.9	0.9	1.8	3.940	
	32	42.4						126	1.1	1.1	2.2	4.000	
	40	48.3						129	1.3	1.3	2.6	4.050	
	50	60.3	6	40			106	136	2.0	2.0	4.0	4.690	
	65	76.1						144	2.3	2.3	4.6	4.850	
	80	88.9						150			5.0	5.030	
	100	114.3	8	50			250	108	165	5.5	5.5	11.0	7.070
	125	139.7							178	6.0	6.0	12.0	7.460
	150	168.3							192	6.5	6.5	13.0	8.780
	(175)	193.7							205	7.0	7.0	14.0	9.460
	200	219.1							218	7.4	7.4	14.8	9.910