

Pipe slides type UPG-2


made of U profile as per DIN 1026

Field of application

- Pipe slide made of U profile steel
- Version applicable for two type 170 EX refrigerant pipe clamps

Advantages

- Two different insulation thicknesses available
- Polyamide sliding plate for low sliding resistance
- Hot-dip galvanised version (further surfaces available upon request)
- Pipe slides also available with pipe clamp welded on at 45° (specify separately with order)

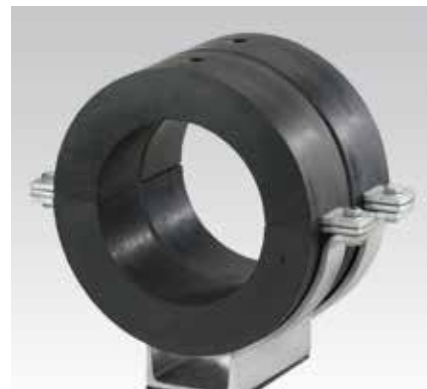

UPG-2 and insulation clamps type 170 EX – to be ordered separately

Features (insulation shell)

Material	Polyurethane, black
Effective density	250 kg/m ³
Thermal conductivity	$\lambda = 0.049 \text{ W/mK at } 0^\circ\text{C}$
Building material class	B2 acc. to DIN 4102
Temperature range	-50 °C to +105 °C
Water vapour diffusion resistance	$\mu = 1,430$

Type	Nominal size DN	Part no.		Sales unit	Pack unit	Part no. accessories	
		slide	insulation shell			bolts	nuts
UPG-2-W37-OF-SF ISO40 114.3	100	117099	111173	1	pieces	105636	105445
UPG-2-W37-OF-SF ISO40 133.0	125	117102	111175			105636	105445
UPG-2-W37-OF-SF ISO40 139.7		117111	111177			105636	105445
UPG-2-W37-OF-SF ISO40 159.0	150	117114	111179			105636	105445
UPG-2-W37-OF-SF ISO40 168.3		117120	111181			105636	105445
UPG-2-W37-OF-SF ISO40 219.1	200	117123	111183			105642	105445
UPG-2-W37-OF-SF ISO40 273.0	250	117136	111187			105680	105459
UPG-2-W37-OF-SF ISO40 323.9	300	117145	111191			105680	105459
UPG-2-W37-OF-SF ISO60 219.1	200	117126	111185			105642	105445
UPG-2-W37-OF-SF ISO60 273.0	250	117139	111189			105680	105459
UPG-2-W37-OF-SF ISO60 323.9	300	117148	111193			105680	105459
UPG-2-W37-OF-SF ISO60 355.6	350	117154	111195			105680	105459
UPG-2-W37-OF-SF ISO60 368.0		117160	111197			105680	105459
UPG-2-W37-OF-SF ISO60 406.4	400	117169	111201			105680	105459
UPG-2-W37-OF-SF ISO60 457.2	450	117172	111203			105680	105459
UPG-2-W37-OF-SF ISO60 508.0	500	117178	111205			105680	105459
UPG-2-W37-OF-SF ISO60 609.6	600	117184	111207			105680	105459







All single parts must be ordered separately. Please refer to the accessories table for corresponding article numbers. Pipe slides without polyamide sliding plate are available upon request.

Pipe slides type UPG-2

made of U profile as per DIN 1026

Alternative pipe clamp
rotated through 45 °
(specify separately
with order)

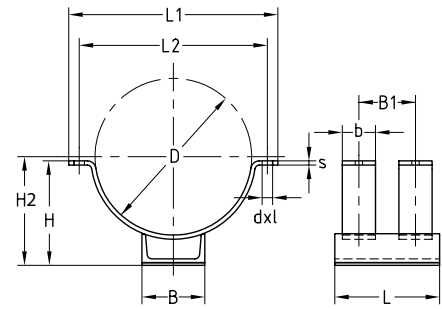

Type	Nominal size DN	Diameter D [mm]	Pipe outer diameter D1 [mm]	Dimensions [mm]											
				d x l	b x s	L	L1	L2	B	B1	H	H1	H2	s1	
UPG-2-W37-OF-SF ISO40 114.3	100	194	114.3	14 x 20	40 x 4	120	274	238	80	60	140	87	144	40	
UPG-2-W37-OF-SF ISO40 133.0	125	213	133.0				300	264			150	88	154		
UPG-2-W37-OF-SF ISO40 139.7		220	139.7								153	87	157		
UPG-2-W37-OF-SF ISO40 159.0	150	239	159.0				319	279	100		165	90	169		
UPG-2-W37-OF-SF ISO40 168.3		248	168.3				328	288			168	88	172		
UPG-2-W37-OF-SF ISO40 219.1	200	299	219.1	18 x 25	50 x 8	200	399	359	120	100	199	97	207		
UPG-2-W37-OF-SF ISO40 273.0	250	353	273.0				453	413			227	99	235		
UPG-2-W37-OF-SF ISO40 323.9	300	404	323.9		60 x 8		504	464	140		257	103	265		
UPG-2-W37-OF-SF ISO60 219.1	200	339	219.1	14 x 20	50 x 8	240	439	399	120		219	117	227	60	
UPG-2-W37-OF-SF ISO60 273.0	250	393	273.0	18 x 25			493	453			248	120	256		
UPG-2-W37-OF-SF ISO60 323,9	300	444	323.9	60 x 8	544		504	140	277		123	285			
UPG-2-W37-OF-SF ISO60 355.6	350	476	355.6		576		536		294		124	302			
UPG-2-W37-OF-SF ISO60 368.0		488	368.0	80 x 8			588	548	120		300		308		
UPG-2-W37-OF-SF ISO60 406.4	400	526	406.4			646	596	319			327				
UPG-2-W37-OF-SF ISO60 457.2	450	577	457.2			697	647			346	123	354			
UPG-2-W37-OF-SF ISO60 508.0	500	628	508,0			748	698	180		378	132	386			
UPG-2-W37-OF-SF ISO60 609.6	600	730	609.6			848	798			140	430	189	438		