

### EURO-QUICK® type EXP

with DÄMMGULAST®, galvanised

#### Application

- Suitable for pipe attachments in industrial areas
- Suitable for fastening of drinking water and heating pipes
- For indoor use

#### Your advantages

- Proven two-piece clamp


- High stiffness due to reinforcing bead
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver
- Fastener screws with captive washer
- Vibration control tested
- Average vibration reduction up to 16 dB(A)



#### Features



Size	Max. recommended load [N]
1/8" - 1"	1,300
1 1/4" - 2"	1,600
67 - 76 mm to 4"	2,300
122 - 133 mm to 8"	2,600

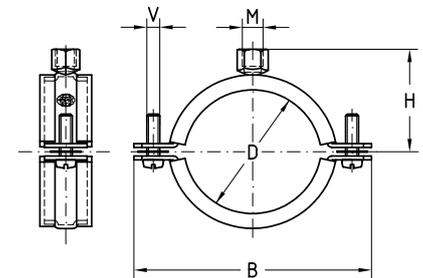

Connecting thread	Size		Dimensions [mm]		V	Part no.	Sales unit	Pack unit	
	[inch]	[mm]	B	H					
M	M8	1/8"	9 - 12	52.1	22.5	M5	172002	100	Pieces
		1/4"	13 - 19	54.5	24		172003		
		3/8"	17 - 23	58.5	26		172004		
		1/2"	21 - 26	62.5	28		172005		
		3/4"	26 - 30	68.5	31		172006		
		1"	33 - 37	76	34.5		172007		
		1 1/4"	40 - 44	91.5	39		172008		
		1 1/2"	48 - 52	99	42.5		172009		
			53 - 58	105	45.5		172010		
			60 - 64	112	49		172011		
M8/M10		67 - 76	126	62	M6	172012	50		
		2 1/2"	75 - 81	134		66			172013
			83 - 90	142		70			172014
		3"	87 - 95	145		71.5			172015
			94 - 104	153		75.5			172016
			102 - 110	161		79.5			172017
		4"	109 - 117	170		84			172018
			122 - 133	184		90.5			172019
			128 - 139	190		93.5			172020
		5"	135 - 145	197		97			172021
			151 - 162	213		105			172022
		6"	158 - 169	222		109.5			172023
			194 - 204	257		127			172024
		8"	214 - 224	272		136			172025
					15				