Single bossed clamps

with DÄMMGULAST® blue, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for pipe attachments in industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- DÄMMGULAST® Vibration control lining with blue indicator stripe, fire class B1 in accordance with DIN 4102, non-dripping in a fire
- Average sound level improvement up to 16.5 dB(A)
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B

Features

Vibration control

Size	Max. recommended load [N]
⅜" - 2"	1,500
70 - 83 mm	2,200
3" - 160 mm	2,900

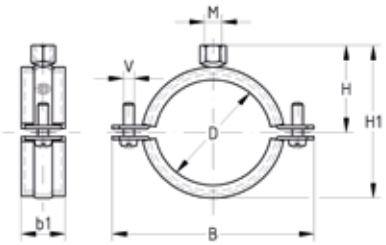

Connecting thread M	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
M8/M10	⅜"		14 - 20	23	64	35.5	55	M6 x 20	**151466**	100	Pieces
	½"		21 - 26		71	38.5	61		**151467**		
	¾"		26 - 30		75	40.5	65		**151468**		
	1"		31 - 38		81	43.5	71	M6 x 25	**151469**		
	1¼"		40 - 47		91	48.5	81		**151471**	50	
	1½"		48 - 54		100	52.5	89		**151472**		
		57	54 - 60		105	55	94		**151473**		
	2"		60 - 66		111	58	100		**151474**		
	70"		68 - 73	28	126	62.5	109	M8 x 35	**151476**		
	2½"		73 - 80		131	65	114		**151477**		
		83	82 - 87		142	70	124		**151478**		
	3"		87 - 94		146	72	128	M8 x 40	**151479**		
		102	99 - 104		157	77.5	139		**151480**		
		110	105 - 112		166	82	148		**151481**		
	4"		112 - 118		172	85	154		**151482**		
		125	122 - 128		182	90	164		**151483**		
		133	132 - 137		191	94.5	173		**151484**		
	5"		137 - 142		196	97	178		**151485**		
		160	159 - 164		218	108	200		**151488**		

Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.
For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

© MÜPRO