MÜPRO

Single bossed clamps

with connection socket and DÄMMGULAST® yellow, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for pipe attachments in industrial areas
- Specially suitable for standing fixings
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Your advantages

- Proven, two-piece single bossed clamp in heavy-duty design
- For bending-resistant fastening at greater distances from the building structure
- Ideal combination when used with pipe nipple and base plate or socket adapter
- DÄMMGULAST® vibration control lining with yellow identification stripe: average sound level improvement up to 22 dB(A)

- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) and is submitted to controls according to RAL-GZ 655-B

Features

Size	Max. recommended load [N]
½" - 2"	1,700
2½" - 83 mm	2,200
3" - 6"	2,900
170 - 200 mm	3,500

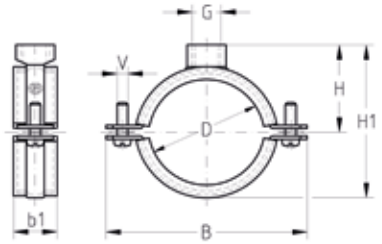

Connecting thread G	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
½"	½"		21 - 26	23	71	47.5	70	M6 x 20	**154945**	100	Pieces
	¾"		26 - 30		75	49.5	74		**154946**		
	1"		31 - 38		81	52.5	80	M6 x 25	**154947**		
	1¼"		40 - 47		91	57.5	90		**154948**	50	
	1½"		48 - 54		100	61.5	98		**154949**		
		57	54 - 60		105	64	103		**154950**		
	2"		60 - 66		111	67	109		**154951**		
	2½"		73 - 80	28	131	74	123	M8 x 35	**154817**		
		83	82 - 87		142	79	133		**154818**		
	3"		87 - 94		146	81	137	M8 x 40	**154819**		
		102	99 - 104		157	86.5	148		**154820**		
		110	105 - 112		166	91	157		**154821**		
	4"		112 - 118		172	94	163		**154822**		
		125	122 - 128		182	99	173		**154823**		
		133	132 - 137		191	103.5	182		**154824**		
	5"		137 - 142		196	106	187		**154825**		
		150	149 - 156		210	113	201		**154827**		
		160	159 - 164		218	117	209		**154828**		
	6"		164 - 169		223	119.5	214		**154829**		
		200	197 - 203		256	136	247		**154832**	25	

⚠ Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

© MÜPRO

Single bossed clamps

with connection socket and DÄMMGULAST® yellow, galvanised

Connecting thread G	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
¾"	2"		60 - 66	23	111	71	113	M6 x 25	**154954**	50	Pieces
	2½"		73 - 80	28	131	78	127	M8 x 35	**154834**		
	3"		87 - 94		146	85	141	M8 x 40	**154836**		
		110	105 - 112		166	95	161		**154838**		
	4"		112 - 118		172	98	167		**154839**		
	5"		137 - 142		196	110	191		**154842**		
		160	159 - 164		218	121	213		**154845**		
	6"		164 - 169		223	123.5	218		**154846**		
		170	169 - 172		225	124.5	220		**154847**		
		180	177 - 183		235	130	231		**154848**	25	
		200	197 - 203		256	140	251		**154849**		

Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

© MÜPRO