


### Nylon plugs

#### Application

- For anchorages in concrete, lime sand brick, solid brick

#### Your advantages

- Proven division of the expansion part for optimal centric screw guidance
- Faster assembly and high pull-out values
- Through-hole in the dowel tip makes it easier to screw through
- Also available in solid plastic case

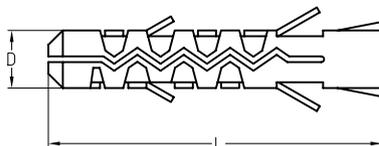

#### Features

| Length L [mm] | Drilling diameter D [mm] | Screw diameter [mm] | Max. recommended load |                 |                     |                      | Part no. | Sales unit | Pack unit |
|---------------|--------------------------|---------------------|-----------------------|-----------------|---------------------|----------------------|----------|------------|-----------|
|               |                          |                     | Concrete B25 [N]      | Solid brick [N] | Lime sand brick [N] | Ventilated brick [N] |          |            |           |
| 30            | 6                        | 5                   | 680                   | 540             | 500                 | -                    | 179465   | 100        | Pieces    |
| 50            |                          |                     | 560                   | -               | -                   | 200                  | 179466   |            |           |
| 40            | 8                        | 6                   | 920                   | 860             | 780                 | -                    | 179467   |            |           |
| 85            |                          | 5                   | 880                   | -               | 740                 | 820                  | 179468   |            |           |
| 50            | 10                       | 8                   | 1,900                 | 1,040           | 980                 | -                    | 179469   | 50         |           |
| 60            | 12                       | 10                  | 2,300                 | 1,120           | -                   | -                    | 179470   | 25         |           |
| 70            | 14                       | 12                  | 3,380                 | 1,380           | -                   | -                    | 179471   | 20         |           |



Minimum screw length = thickness of the mounting part + dowel length + screw diameter

#### Nylon plugs

in stackable plastic box with lid

| Length L [mm] | Drilling diameter D [mm] | Screw diameter [mm] | Content [pieces/box] | Part no. | Sales unit | Pack unit |
|---------------|--------------------------|---------------------|----------------------|----------|------------|-----------|
| 30            | 6                        | 5                   | 5,600                | 179472   | 1          | Box       |
| 40            | 8                        | 6                   | 2,800                | 179473   |            |           |
| 50            | 10                       | 8                   | 1,400                | 179474   |            |           |
| 60            | 12                       | 10                  | 700                  | 179475   |            |           |
| 70            | 14                       | 12                  | 560                  | 179476   |            |           |

