


Nylon plugs

Application

- For anchorages in concrete, lime sand brick, solid brick


Your advantages

- Proven division of the expansion part for optimal centric screw guidance
- Faster assembly and high pull-out values
- Through-hole in the dowel tip makes it easier to screw through
- Also available in solid plastic case

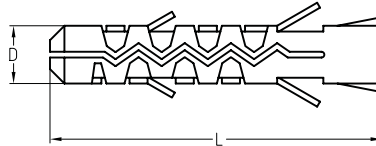

Features

Length L [mm]	Drilling diameter D [mm]	Screw diameter [mm]	Max. recommended load				Part no.	Sales unit	Pack unit
			Concrete B25 [N]	Solid brick [N]	Lime sand brick [N]	Ventilated brick [N]			
30	6	5	680	540	500	-	179465	100	Pieces
50			560	-	-	200	179466		
40	8	6	920	860	780	-	179467		
85		5	880	-	740	820	179468		
50	10	8	1,900	1,040	980	-	179469	50	
60	12	10	2,300	1,120	-	-	179470	25	
70	14	12	3,380	1,380	-	-	179471	20	

 Minimum screw length = thickness of the mounting part + dowel length + screw diameter

Nylon plugs in stackable plastic box with lid

Length L [mm]	Drilling diameter D [mm]	Screw diameter [mm]	Content [pieces/box]	Part no.	Sales unit	Pack unit
30	6	5	5,600	179472	1	Box
40	8	6	2,800	179473		
50	10	8	1,400	179474		
60	12	10	700	179475		
70	14	12	560	179476		

